



AUTOMATION INDIA


Manufacturer of Safety Equipments Mining & Industrial

Chotki Murram, Patratu Basti, Ramgarh Cantt.

Dist.-Ramgarh, (Jharkhand) - 829122

Mob. : 8917218270, E-mail : automationindiainfo@gmail


Terminal wires diagram

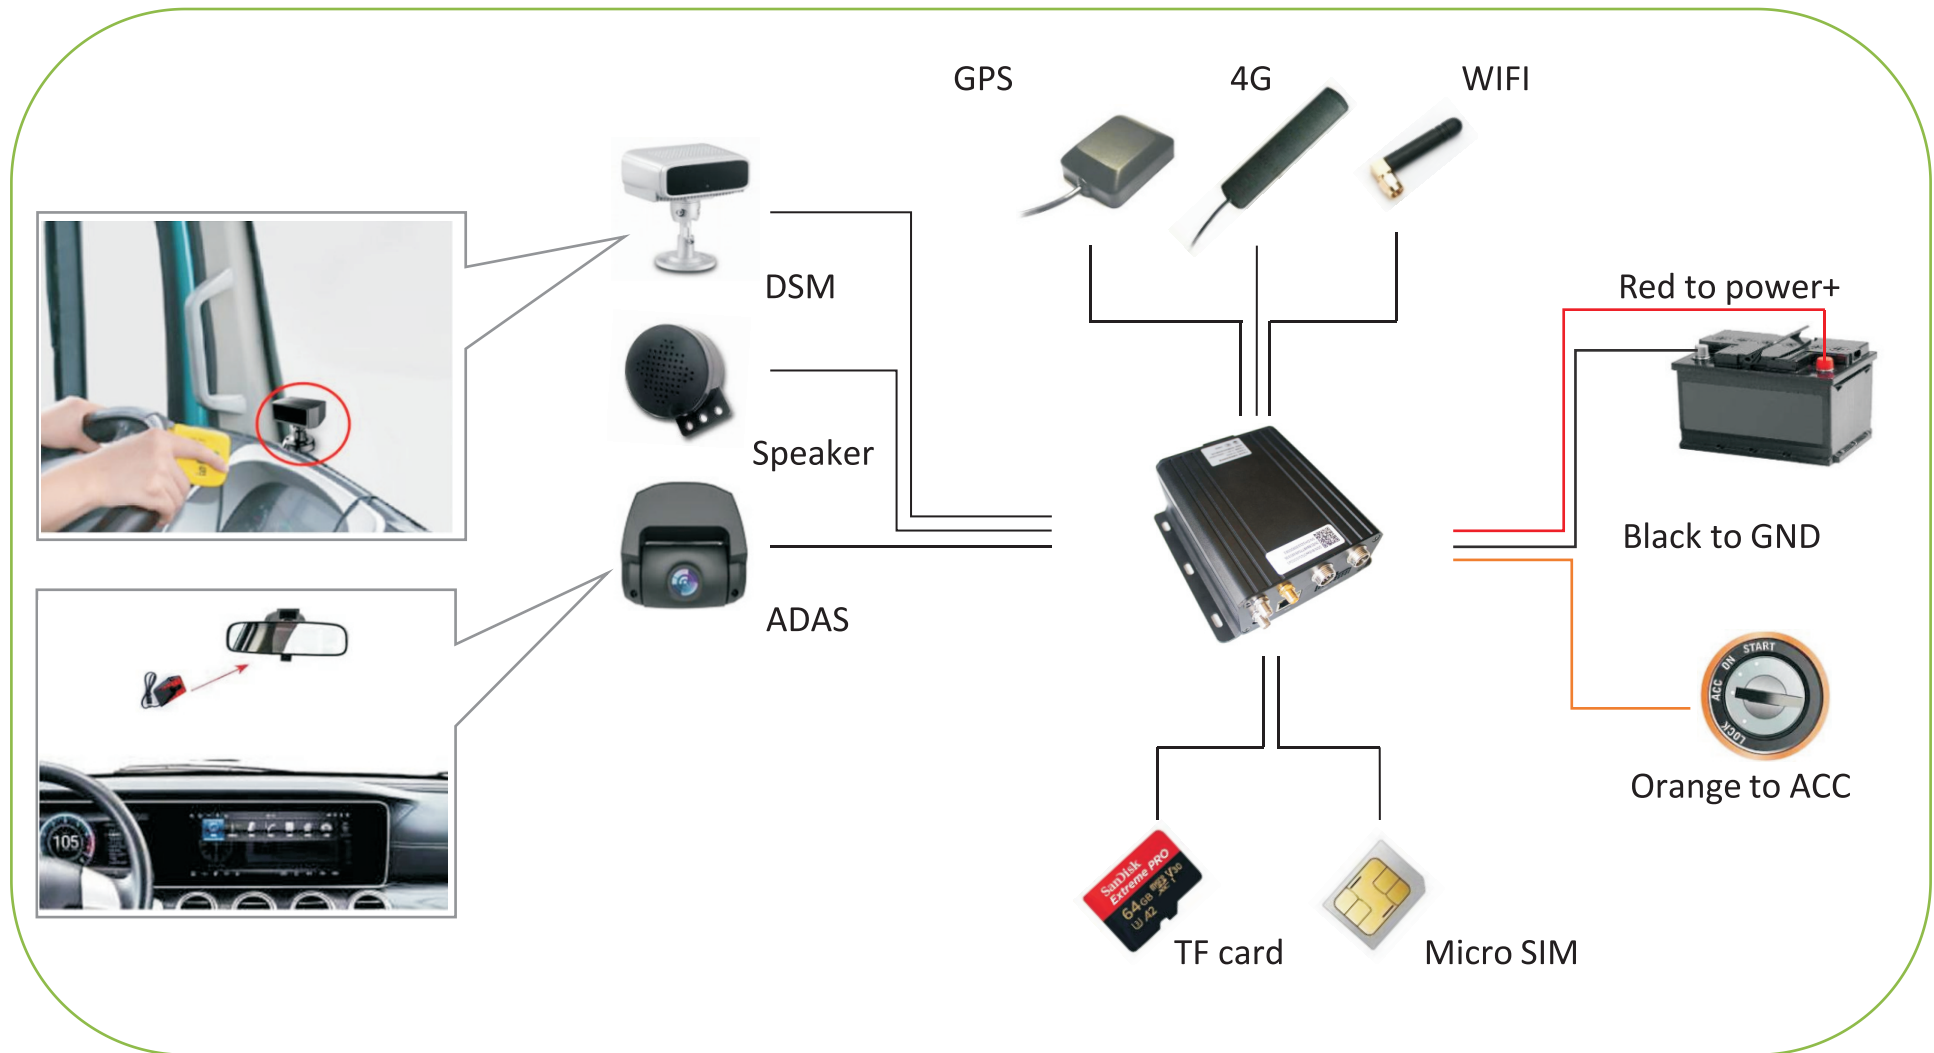

Quick Manual

1. Connect the power wires.

Connect the red wire to full-time power, the orange wire to ACC, and the black wire to the GND.

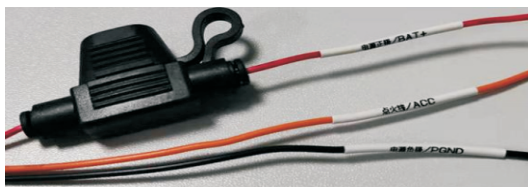


2. Connect the accessories.

Inert the TF card/Micro SIM, connect the GPS/4G/WIFI antennas, and all the cameras.




3. Connect the APP of phone.

Install APP to the android phone. Run it and connect the WIFI SSID names TS-AP*****, password is 123456789.

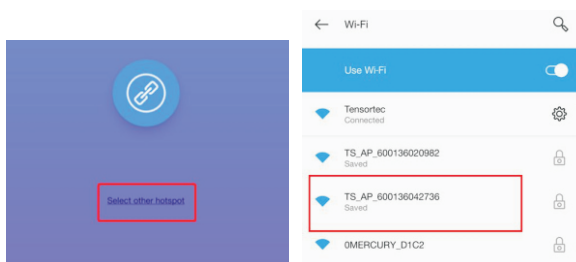


4. Input the configuration of server.

Type in the device ID and server IP/port in the page of Terminal config.

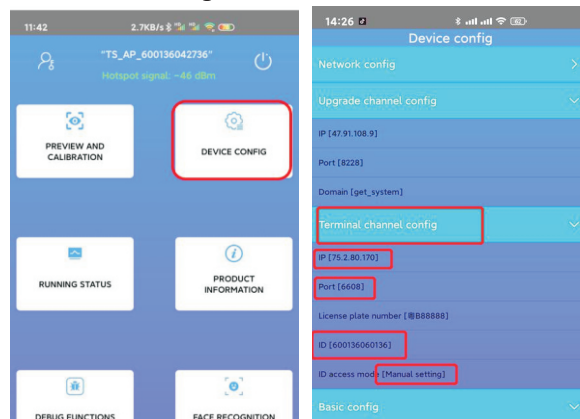


5. Test it in the office.

Enter the page of Debug functions, switch the mode to test.

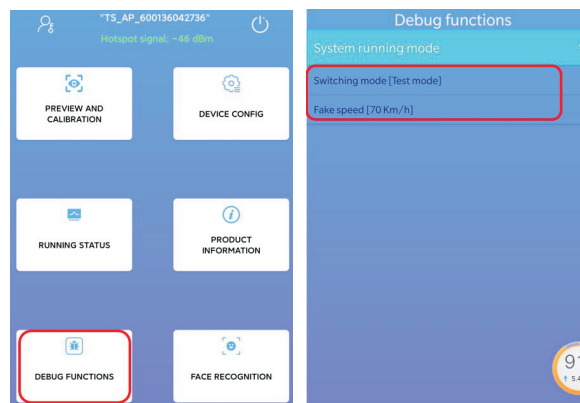

6. Log in the server platform.

Enter the test account of platform, it will display the device in the left, then you can test the live streaming and different alarms of uploading.

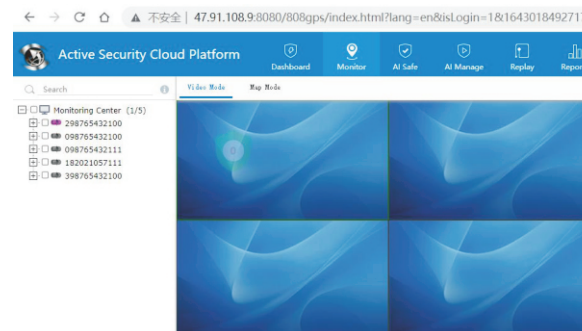

7. Install device in the vehicle.

DSM camera is installed in the lower left corner of the front windshield (not obstructing the line of sight).

ADAS camera is pasted on the front windshield in the car (near the rear-view mirror in the car).

GPS antenna is best to install outside the car or under the windshield, with not covered by metal shell.

Terminal is installed under the seat or under the center dash panel.

